




Fontwell White

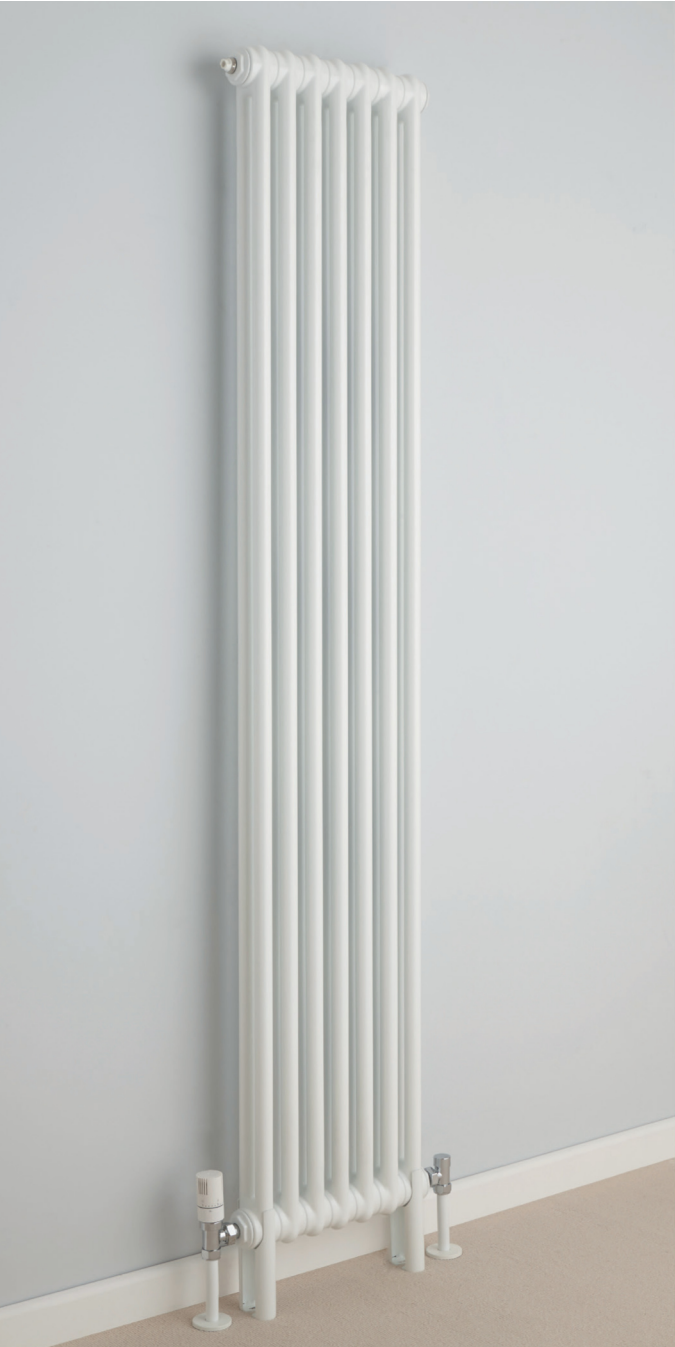

Height (mm):

300	400	500	600	750	1500	1800
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Column:

2	3	4
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Sections / Width:

4sec 206mm	6sec 299mm	7sec 341mm	8sec 386mm	9sec 431mm	10sec 476mm
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11sec 521mm	13sec 611mm	18sec 836mm	21sec 971mm	22sec 1016mm	26sec 1196mm
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
30sec 1376mm	35sec 1601mm	40sec 1826mm			
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			

Mounting:

Standard Wall Brackets	Slip on Feet	Floor Mount	Stud Wall Brackets
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Finish:

White RAL9016	Textured Anthracite
<input type="checkbox"/>	<input type="checkbox"/>

CAUTION HEAVY, OVER 25KG: ☐

Thank you for purchasing your
Fontwell White Radiator from
Radiators 4u.

We endeavour to ensure your products are delivered to
you in perfect condition.

Once you have checked your delivery, if you have any
queries about your Fontwell White radiator please contact our
Customer Services Department on 01342 306880 who will
be happy to assist you.

HOW TO HANDLE YOUR FONTWELL WHITE

This Fontwell White radiator should be carried in an upright position. Carrying the radiator in a horizontal position (like a stretcher) will Probably cause the radiator to bow and potentially invalidate the warranty.

Correct upright position

Incorrect horizontal position

UNPACKING

When unpacking your Fontwell White radiator please ensure you:

- Identify and retain the fittings pack and Fittings Instructions located inside the packaging.
- Take care if using sharp blades to cut the outer cover to avoid scratching the paint finish.
- Retain the packaging and use these to help keep the radiator protected until it is installed.
- Carefully inspect the radiator before installation. If there are any issues, repack the radiator and contact our Customer Services team.

BEFORE INSTALLATION

- Carefully read the Fontwell White Fittings Instructions.
- Failure to follow the Fitting Instructions may result in the radiator not functioning correctly or may risk damaging the radiator permanently.
- The Fittings Instructions contain information on appropriate use of corrosion inhibitor and our terms and conditions.

Please note we are unable to accept responsibility for replacement of scratched or damaged radiators once they have been installed.