




Classic White

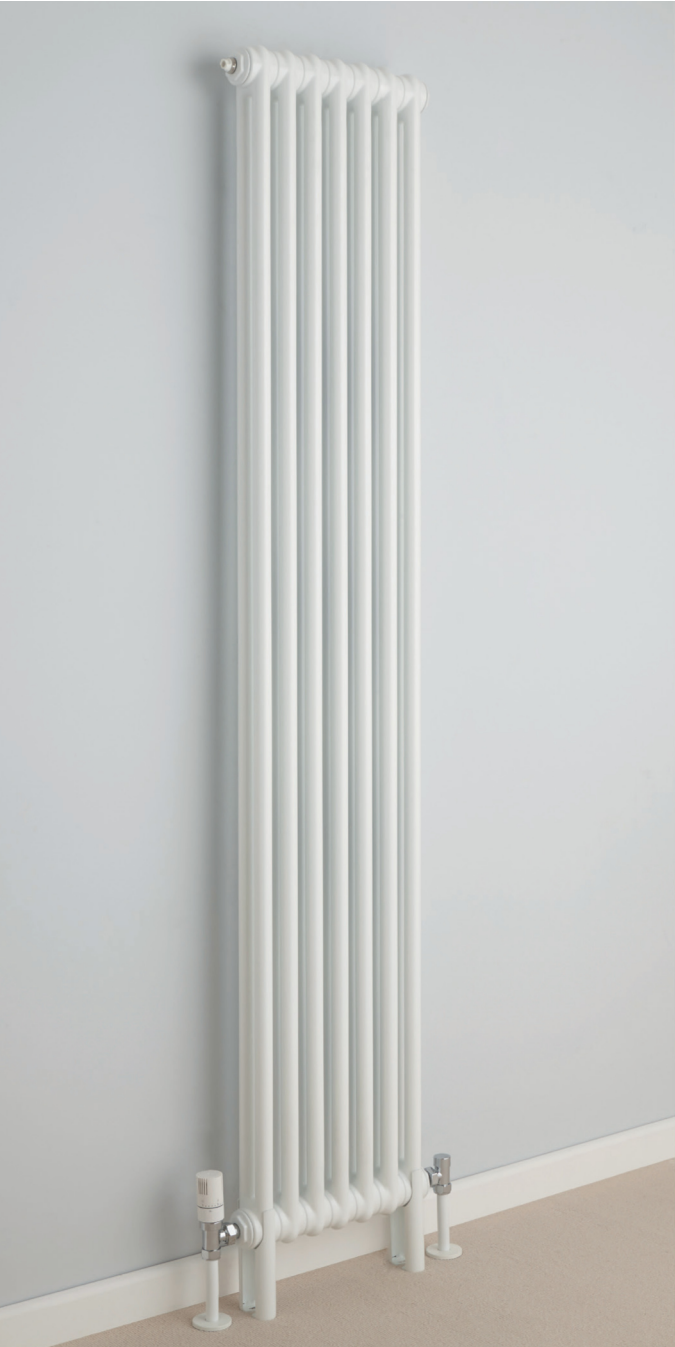

Height (mm):

300

400

500

600

750

1500

1800

Column:

2

3

4

Sections / Width:

4sec

206mm

6sec

299mm

7sec

341mm

8sec

386mm

9sec

431mm

10sec

476mm

11sec

521mm

13sec

611mm

18sec

836mm

21sec

971mm

22sec

1016mm

26sec

1196mm

30sec

1376mm

35sec

1601mm

40sec

1826mm

Mounting:

Standard

Wall Brackets

Slip on

Feet

Floor

Mount

Stud Wall

Brackets

Finish:

White RAL9016

Textured Anthracite

CAUTION HEAVY, OVER 25KG: ☐

Thank you for purchasing your
Fontwell White Radiator from
Radiators 4u.

We endeavour to ensure your products are delivered to
you in perfect condition.

Once you have checked your delivery, if you have any
queries about your Fontwell White radiator please contact our
Customer Services Department on 01342 306880 who will
be happy to assist you.

HOW TO HANDLE YOUR FONTWELL WHITE

This Fontwell White radiator should be carried in an upright position.
Carrying the radiator in a horizontal position (like a stretcher) will
Probably cause the radiator to bow and potentially invalidate the
warranty.

✓

Correct upright position

✗

Incorrect horizontal position

UNPACKING

When unpacking your Fontwell White radiator please ensure you:

• Identify and retain the fittings pack and Fittings Instructions located inside the packaging.

• Take care if using sharp blades to cut the outer cover to avoid scratching the paint finish.

• Retain the packaging and use these to help keep the radiator protected until it is installed.

• Carefully inspect the radiator before installation. If there are any issues, repack the radiator and contact our Customer Services team.

BEFORE INSTALLATION

• Carefully read the Fontwell White Fittings Instructions.

• Failure to follow the Fitting Instructions may result in the radiator not functioning correctly or may risk damaging the radiator permanently.

• The Fittings Instructions contain information on appropriate use of corrosion inhibitor and our terms and conditions.

Please note we are unable to accept responsibility for replacement of scratched or damaged radiators once they have been installed.

Declaration of Performance

Z5-10.1920/1-2 Column

Z5-10.2920/1-3 Column

Z5-10.3920/1-4 Column

CORNW+TA_IR_12

Website: www.radiators4u.co.uk

Telephone Number: 02394 216 216

Sales: eq@radiators4u.co.uk

Customer Services: cs@radiators4u.co.uk

Radiators 4u

Unit 4 - Victory Trading Estate

Kiln Road

Portsmouth - PO3 5LP

All products UKCA approved & certified to BS-EN442